

SLIDING SINGLE REBATED DOOR - MANUAL OPERATION MODEL HI-SKD-F79-2

A60 fire class
Tested to IMO 754(18)
FTP Code Part 3

EC Type-Examination Certified
CE Marked with the Wheel
FTP Code A.1 Part 4



STANDARD SPECIFICATION

Doorleaf: Rebated. 53-55 mm alt. 46-48 mm thick, 1,0 - 2,0 mm galvanized steel skins, Fipro or Thermax insulation core, reinforced.

Frame arrangement: Frame, track, trolley, counterweight, air brake (brackets by client). Prepared for welding to bulkhead.

Sill: Galvanized flat bar, alt. 4.

Hoseport hatch: On request.


Finish: Primed.

Hardware: Hook latch, recessed shell handle on bulkhead side, lever handles. Electro magnet.

Max. size: 2400 x 2400 mm WxH c/o.

Weight: Doorleaf = 35 kg/m²
Doorleaf and frame = 50 kg/m²

Double leaf door: Data sheet MAS6.

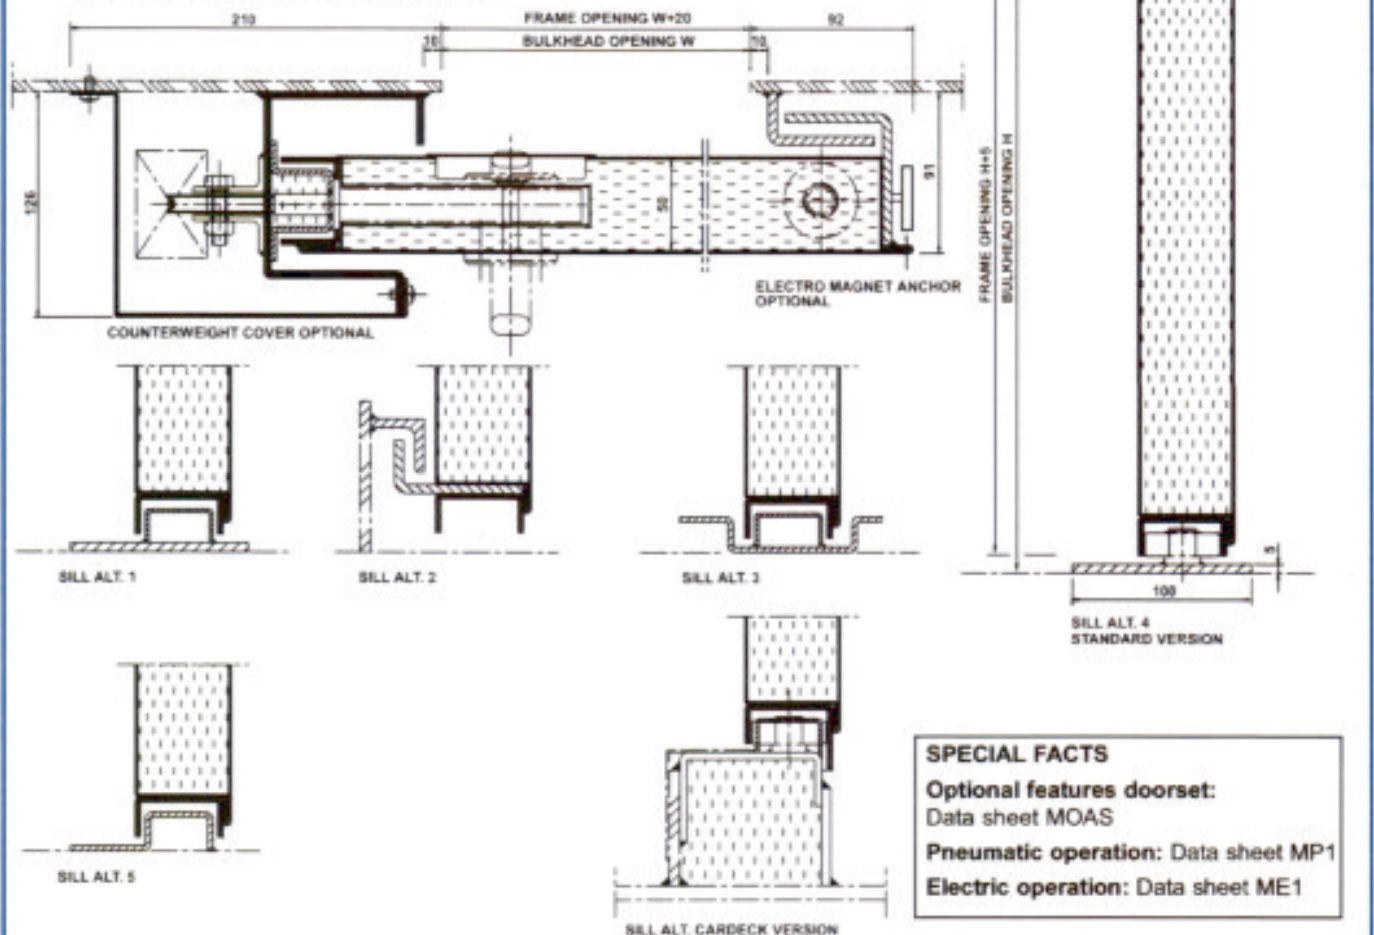

All dimensions and measurements are subject to final check onboard and updated approval / production drawings